


Butterfly Valves

- Available 2" to 48"
- ISO 5211 mounting flange
- Drop on actuation
- Wafer or lug style body
- Ideal for on-off or throttling
- Full flanged style 36" to 48"
- Bi-directional dead-end capability



Ordering Information

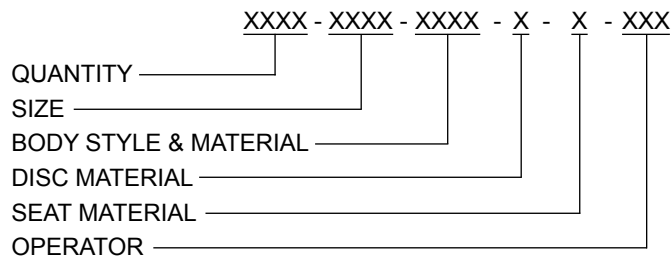

Example: Include full description

1000 BFWLIB GHW

10" Lug Style Butterfly Valve
Ductile Iron Body, Ductile Iron Disc,
Buna Seat C/W Gear Operator

Butterfly Option Selection	
Size	2" - 0200 2 1/2" - 0250 3" - 0300 4" - 0400 5" - 0500 6" - 0600 8" - 0800 10" - 1000 12" - 1200 14" - 1400 16" - 1600 18" - 1800 20" - 2000 24" - 2400 30" - 3000 36" - 3600 42" - 4200 48" - 4800
Body Style and Material	BFWW - Wafer, ASTM A-536 - Ductile Iron BFWL - Lug, ASTM A-536 - Ductile Iron
Disc Material	I - Ni / Ductile A536 S - 316 Stainless Steel B - Bronze
Seat Material	B - Buna E - EPDM
Operator	BST - Bare Stem GHW - Gear Operator LVP - 10 Position Lever

Shipping Weights (Lbs)														
Size	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"
Wafer / BST	8	9	10	14	18	20	33	49	82	110	155	300	330	400
Lug / BST	10	12	14	23	27	36	47	69	102	143	243	410	512	686
Lever	3	3	3	3	3	3	7	7	7	-	-	-	-	-
Gear	4	4	4	4	4	8	20	24	25	26	28	36	71	132

Notes:

Manufacturer reserves the right to modify dimensions, materials, or design. Consult factory for certification.



**Sure Flow
Equipment Inc.**

Toll Free: 1-800-263-8251 Toll Free Fax: 1-800-876-1164
International: 1-905-335-1350 International Fax: 1-905-332-4993
Email: info@sureflowequipment.com www.sureflowequipment.com

