


Fabricated Tee Strainers

TW150 / TW300 - Carbon Steel
 TW150SS / TW300SS - Stainless Steel

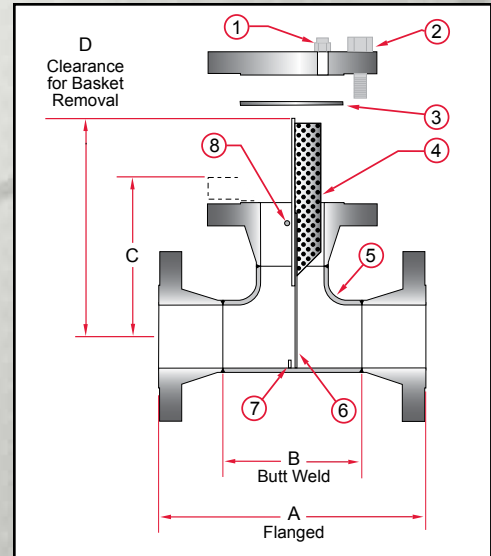

Notes:

- Higher ASME pressure ratings available
- Larger sizes available

Manufacturer reserves the right to modify dimensions, materials, or design. Consult factory for certification.

		Construction							
Item		1	2	3	4	5	6	7	8
Description		Vent Assembly	Bolting	Gasket	Basket Assembly	Body Assembly	Body Ring	Screen Guide	Cross Bar

Dimensions (Inches)									
Size		A		B		C		D	
Inches	Prefix	150	300	150	300	150	300	150	300
2	0200	10	10 1/2	5	5	5 7/8	6 1/4	13	13
2 1/2	0250	11 1/2	12	6	6	6 3/4	7 1/8	13	13
3	0300	12 1/4	13	6 3/4	6 3/4	7 3/16	7 3/4	14	14
4	0400	14 1/4	15	8 1/4	8 1/4	8 3/16	8 7/8	16	16
5	0500	16 3/4	17 1/2	9 3/4	9 3/4	9 7/16	10 1/4	19	19
6	0600	18 1/4	19	11 1/4	11 1/4	10 1/4	11 1/16	22	22
8	0800	22	22 3/4	14	14	12 1/4	13 1/8	25	25
10	1000	25	26 1/4	17	17	13 13/16	15 1/8	29	29
12	1200	29	30 1/4	20	20	15 7/8	17 1/4	31	31
14	1400	32	33 1/4	22	22	17 1/2	18 7/8	38	38
16	1600	34	35 1/2	24	24	18 9/16	20 1/8	41	41
18	1800	38	39 1/2	27	27	20 11/16	22 1/4	46	46
20	2000	41 3/8	42 3/4	30	30	22 9/16	24	51	51
24	2400	46	47 1/4	34	34	25	26 1/2	56	56

Ordering Information

Example: Include full description

Size Model Screen
 (Prefix) Number Opening
2400 TW300 125

24" Tee Strainer, Carbon Steel, Class 300 ASME Flanges, 1/8" Perf Screen.

Operating Pressures and Temperatures			
Type	Size	psi @ Temp Steam	psi @ Temp WOG
TW150	2" - 24"	150 @ 366 °F	285 @ 100 °F
TW150SS	2" - 24"	150 @ 366 °F	275 @ 100 °F
TW300	2" - 24"	300 @ 422 °F	740 @ 100 °F
TW300SS	2" - 24"	300 @ 422 °F	720 @ 100 °F



Sure flow
 Equipment Inc.

Toll Free: 1-800-263-8251 Toll Free Fax: 1-800-876-1164
 International: 1-905-335-1350 International Fax: 1-905-332-4993
 Email: info@sureflowequipment.com www.sureflowequipment.com