


Dimensions - Launchers

LCR150 / LCR300 / LCR600 - Carbon Steel
 LCR150SS / LCR300SS / LCR600SS - Stainless Steel

ASME Class 150 / 300 / 600 - Flanged Connections

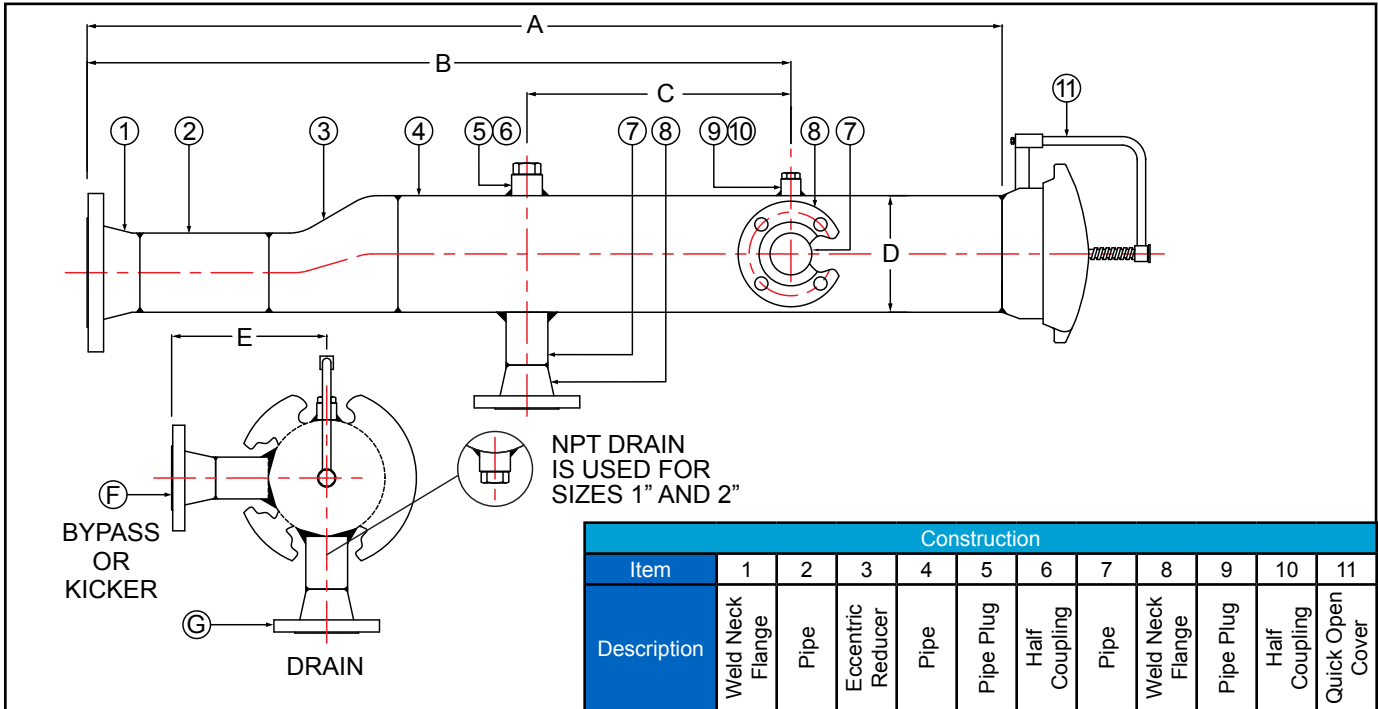

Notes:

- Higher ASME pressure ratings available
 - Larger sizes available
- Manufacturer reserves the right to modify dimensions, materials, or design. Consult factory for certification.

Dimensions (Inches)								
Run Size	Prefix	A	B	C	D	E	F	G
4	0400	52	40	15	6 5/8	11	2	1
6	0600	56	42	16	8 5/8	12	3	2
8	0800	58	44	18	10 3/4	13	4	2
10	1000	64	47	18	12 3/4	14	4	2
12	1200	68	49	18	16	16	6	4
14	1400	76	54	18	16	16	6	4
16	1600	90	64	20	18	17	8	4
18	1800	96	66	20	20	20	10	6
20	2000	98	66	22	24	21	10	6
24	2400	104	70	26	26	23	10	6
26	2600	108	72	26	28	24	10	6
28	2800	110	74	28	30	26	12	6
30	3000	114	76	28	36	28	12	8
36	3600	122	82	32	40	32	14	8

Ordering Information

Example: Include full description

Size Model
 (Prefix) Number

3000 LCR150SS

30" Launcher, ASME Class 150, Stainless Steel

Operating Pressures and Temperatures

Type	Size	psi @ Temp Steam	psi @ Temp WOG
LCR150	4" - 36"	150 @ 366 °F	285 @ 100 °F
LCR150SS			275 @ 100 °F
LCR300	4" - 36"	300 @ 422 °F	740 @ 100 °F
LCR300SS			720 @ 100 °F
LCR600	4" - 36"	600 @ 489 °F	1480 @ 100 °F
LCR600SS			1440 @ 100 °F



**Sure Flow
 Equipment Inc.**

Toll Free: 1-800-263-8251 Toll Free Fax: 1-800-876-1164
 International: 1-905-335-1350 International Fax: 1-905-332-4993
 Email: info@sureflowequipment.com www.sureflowequipment.com

